


### Storage room with door – 800 x 800 mm (31.5 x 31.5 inches)

Item.no: **Midi** IS-9419-1  
**Maxi** IS-9419-2

**Complete with:**


1 Base post, 750 mm, adj. foot	<b>Midi IS-9419-1</b>	<b>Maxi IS-9419-2</b>
1 Extension post, 750 mm	IS-0750-EBM	IS-0750-EBM
1 Top post, 755 mm	IS-0750-EEM	IS-0750-EEM
2 90° corner post, Base, wave cut	IS-0755-ETM	IS-0755-ETM
2 90° corner post, Center, 750 mm	IS-W750-IB90	IS-W750-IB90
2 90° corner post, Top, 755 mm	IS-0750-IE90	IS-0750-IE90
2 90° corner post, Center, 850 mm	IS-0755-IT90	IS-0755-IT90
2 90° corner post, Top, 855 mm	_____	IS-0850-IE90
1 Extension post, 200 mm	_____	IS-0855-IT90
2 Straight beam, 800	_____	IS-0200-EEM
6 Corner trims, 750/850	IS-800-BS	IS-800-BS
3 Corner trims, 770	IS-0750-CT	IS-0850-CT
2 Kickers & Hangers	IS-0770-CT	IS-0770-CT
1 Door, straight	IS-800-KHN	IS-800-KHN
	IS-9458	IS-9458

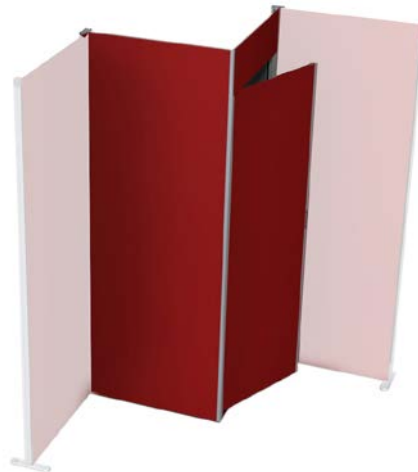

### Accessories



**Coat hook**  
with straight beam 800 mm  
Item IS-9430

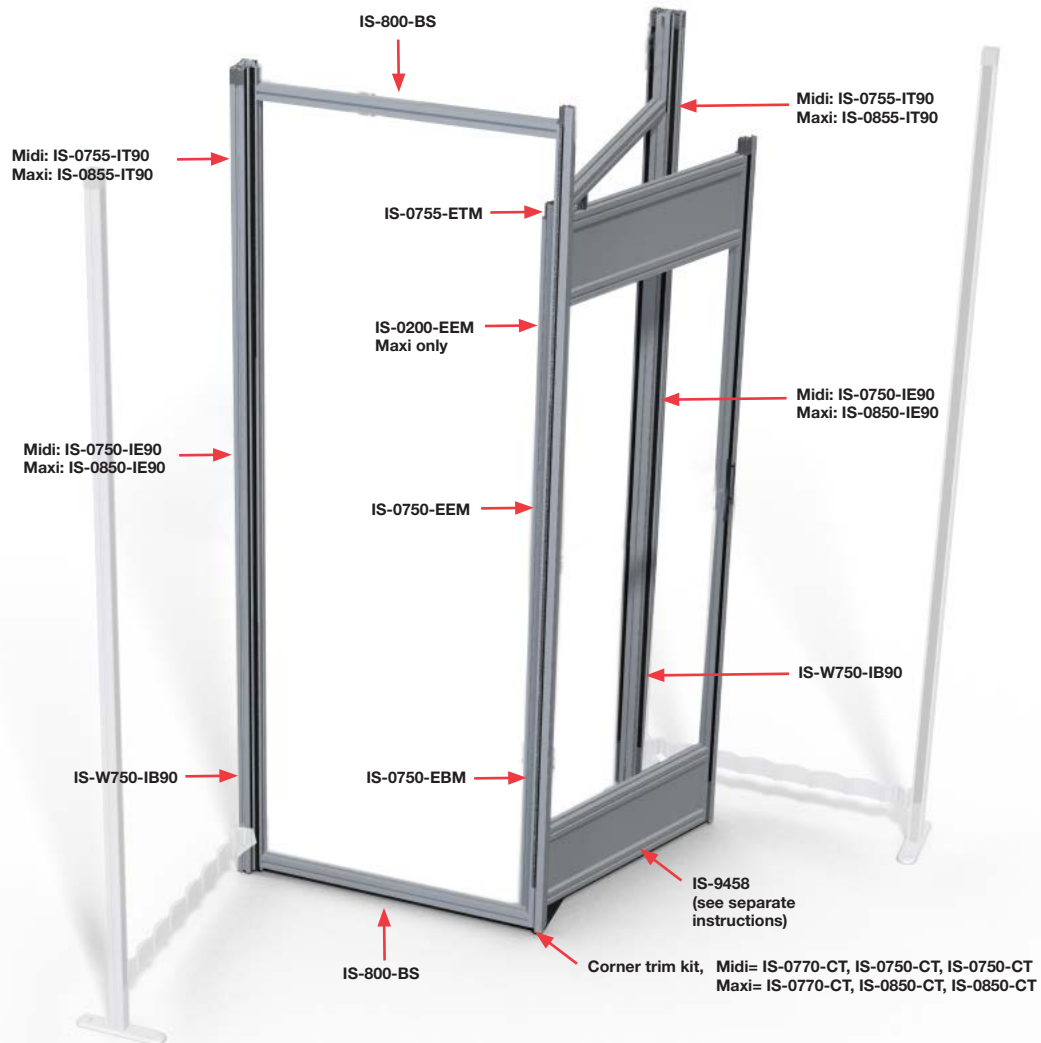

**1** This unit is a 'Starter module'.  
Build it first before adding/connecting the other modules in your display.


**2** The door unit can be installed at any of the two positions in the module.

**3** As with all fixed-beam modules, be sure to level the complete storage room module before adding your graphic panels.

**4** When you are ready, you will have 2 set of corner trim left, this will be mounted in each end of the wall!


## Graphic production and corner trim

for graphic production of door, see separate instruction sheet.

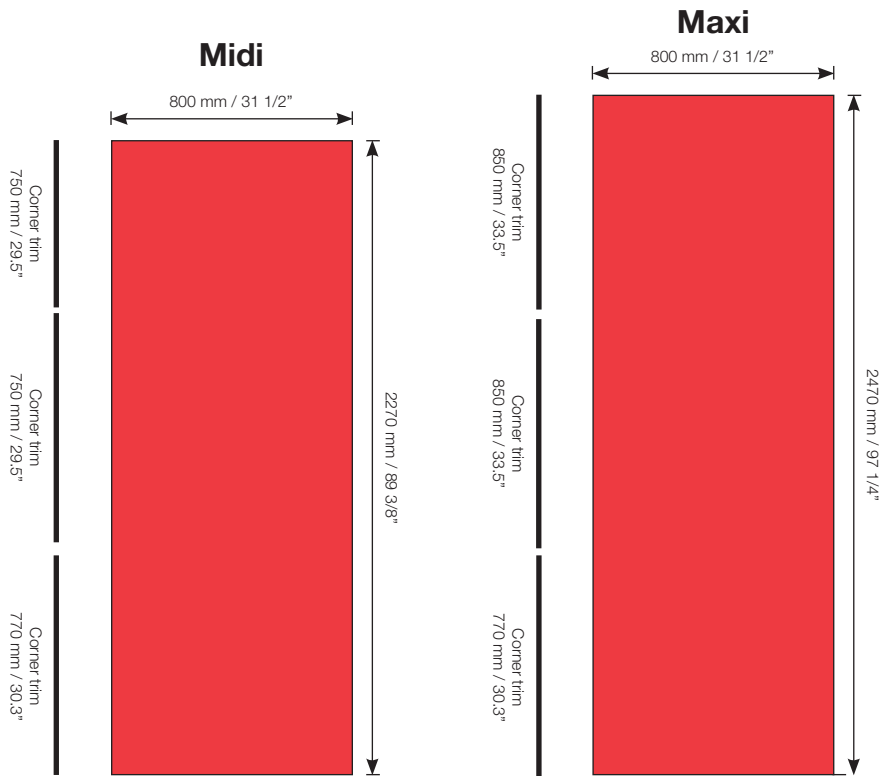

A template for the graphic panel production can be downloaded at:  
<http://markbricdisplay.net/imagebank/PT-general.html>

## Graphic panel attachments

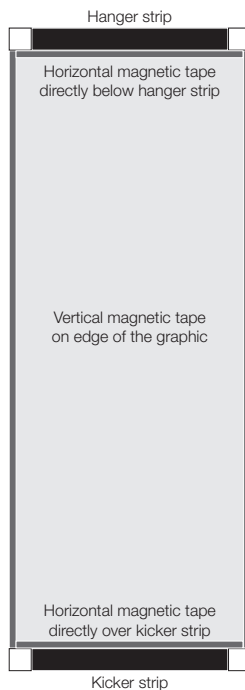

### Accessories

#### Kickers & Hangers

(incl. for the first set of panels)  
800 mm / 31 1/5" Item IS-800-KHN

**Magnetic tape** (not incl.)  
12 mm/0.5" A tape, 30 m / 98 ft. Item 82281

Each panel needs:  
Midi 6,2 m / 21 ft.  
Maxi 6,6 m / 22 ft.

### Printer material

We recommended the following material:

**Poster paper:** 180 gr / 0.4 lb.  
The printed graphic panels must be laminated before use.  
Front side: 125 microns (0,125 mm) / 0.005"  
Reverse side: 250 microns (0,250 mm) / 0.010" "stop light"

**Polyester film:** 330-370 microns (0,350 mm) / 0.013-0.015"  
Top laminate: 125 microns (0,125 mm) / 0.005"



Kicker



Hanger

### Mounting of Kickers and Hangers

Kickers and hangers to be fixed at the bottom and at the top of the graphic panels (reverse side).

### Mounting of Magnetic Tape

Magnetic tape to be fixed **horizontally** directly over/under kicker/hanger strip. Magnetic tape to be fixed **vertically** along each side of the graphic panels.

**IMPORTANT** Carefully mount the magnetic tape slightly inset from the edge of the graphic panel by approximately 0,25 mm / 0.010". Once mounted, a very thin straight white line should show between the edge of the graphic and the outside edge of the magnetic tape. Do not exceed 0,5 mm / 0.020".

### Application Techniques

To obtain optimum adhesion, the bonding surfaces must be well unified, clean and dry. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

Note: Be sure to follow solvent manufacturer's precautions and directions for use when using solvents.